



StreamLED 2 DALI



with cable gland and connection cable 30 cm

The StreamLED 2 DALI is the conventional StreamLED 2 with DALI capability. It has a high luminous efficacy with minimal failure rate. The glare is minimised by means of a special satined tube – other features include the high protection category (IP66/IP69) and the compact design.

Technical Data

Input voltage:	230 VAC
System performance:	35W/55W
Luminous flux:	3'997lm/6'730lm
Light efficiency:	113lm/W/123lm/W
Inside of CRI:	Ra > 80
operating life:	L70 B10 > 50'000h
Protection category:	
– direct connection:	IP66/IP69
– direct connection*:	IP67
Impact resistance:	
– direct connection:	IK10
Protection class:	II
Operating range of temperature:	-25°C to +40°C
Colour temperature:	3'000K/4'000K/5'000K
Beam angles LED:	120°
Material housing / tube:	PMMA acrylic glass
Housing colour:	cover cap anthracite RAL7016/ tube transparent frosted (satinised)


*IP67: For temporary immersion, protected with moulded end caps and moulded connection cable

Product features

- high efficiency and uniformity of illuminance
- robust and impact-proof
- energy-saving (low power/energy consumption with high light power)
- easy installation
- wide range of products
- suitable for use in the harshest environments (tunnels, sewage treatment plants, chemical industry)
- version single-sided with connection cable 30 cm (5 poles)
- through-wiring available for all models

Dimensions

StreamLED 2 DALI with connection cable 30cm

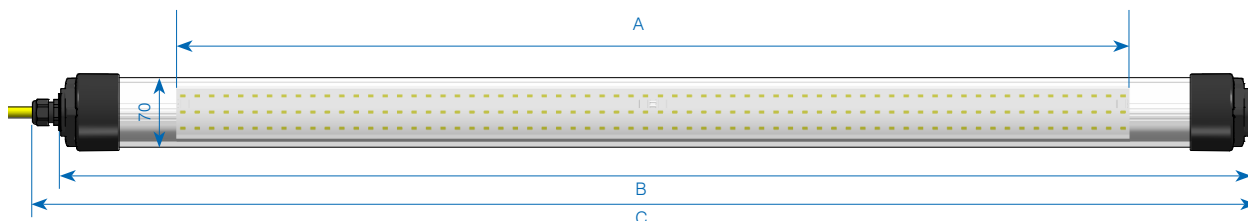

StreamLED 2 – DALI

Item no.	Output	Illuminant	DALI	Luminous flux	Light colour	Operating voltage	A mm	B mm	C mm
860902	35 W	LED	1	3'997lm	3'000K	230 VAC	958	1'198	1'230
✓ 860904	35 W	LED	1	3'997lm	4'000K	230 VAC	958	1'198	1'230
✓ 860906	35 W	LED	1	3'997lm	5'000K	230 VAC	958	1'198	1'230
860903	55 W	LED	2	6'730lm	3'000K	230 VAC	1'437	1'677	1'709
✓ 860905	55 W	LED	2	6'730lm	4'000K	230 VAC	1'437	1'677	1'709
✓ 860907	55 W	LED	2	6'730lm	5'000K	230 VAC	1'437	1'677	1'709

*The overall size is increased by approx. 20mm in the chain design (cable on each side). The cover cap is included in the scope of supply.

Accessories/spare parts

Item no.	Designation
✓ 840083	Holder A4, Ø70mm/wall mounting, angled 130mm, for SL70
✓ 840084	Holder A4, Ø70mm/wall mounting, angled 147mm for SL70
✓ 840085	Holder A4, Ø70mm/attachment fitting straight, 160mm, for SL70
✓ 103355	Clamp plastic type 63, Ø63-71 mm, for SL70
✓ 136624	Cover cap SL70, with cable gland M20×1.5mm, plastic anthracite
✓ 148225	Cover cap SL70, with locking device M20×1.5mm, plastic anthracite

✓ from stock, offer subject to prior sale

2/2